


PoleForeman - Pole Loading Analysis Report

License: Alpine Communication Corp

Version 7.4.17



POLE LOADING DATA

Pole: 40/2 Wood (Wood-Cylindrical)

Soil: None

Pole Loading

NESC Edition: 2012

Rule 250C: Temp=60F, Wind=130 mph, Ice=0.00 in

Horizontal: 42% (250C)

Loading District: Light


Vertical: 4% (k=1.20)

Construction: Grade B

POLES

Pole #	Length (ft)	Depth (ft)	Elevation (ft)
0	40	6.5	0
1	35	6	0

POLE LINE TOPOLOGY

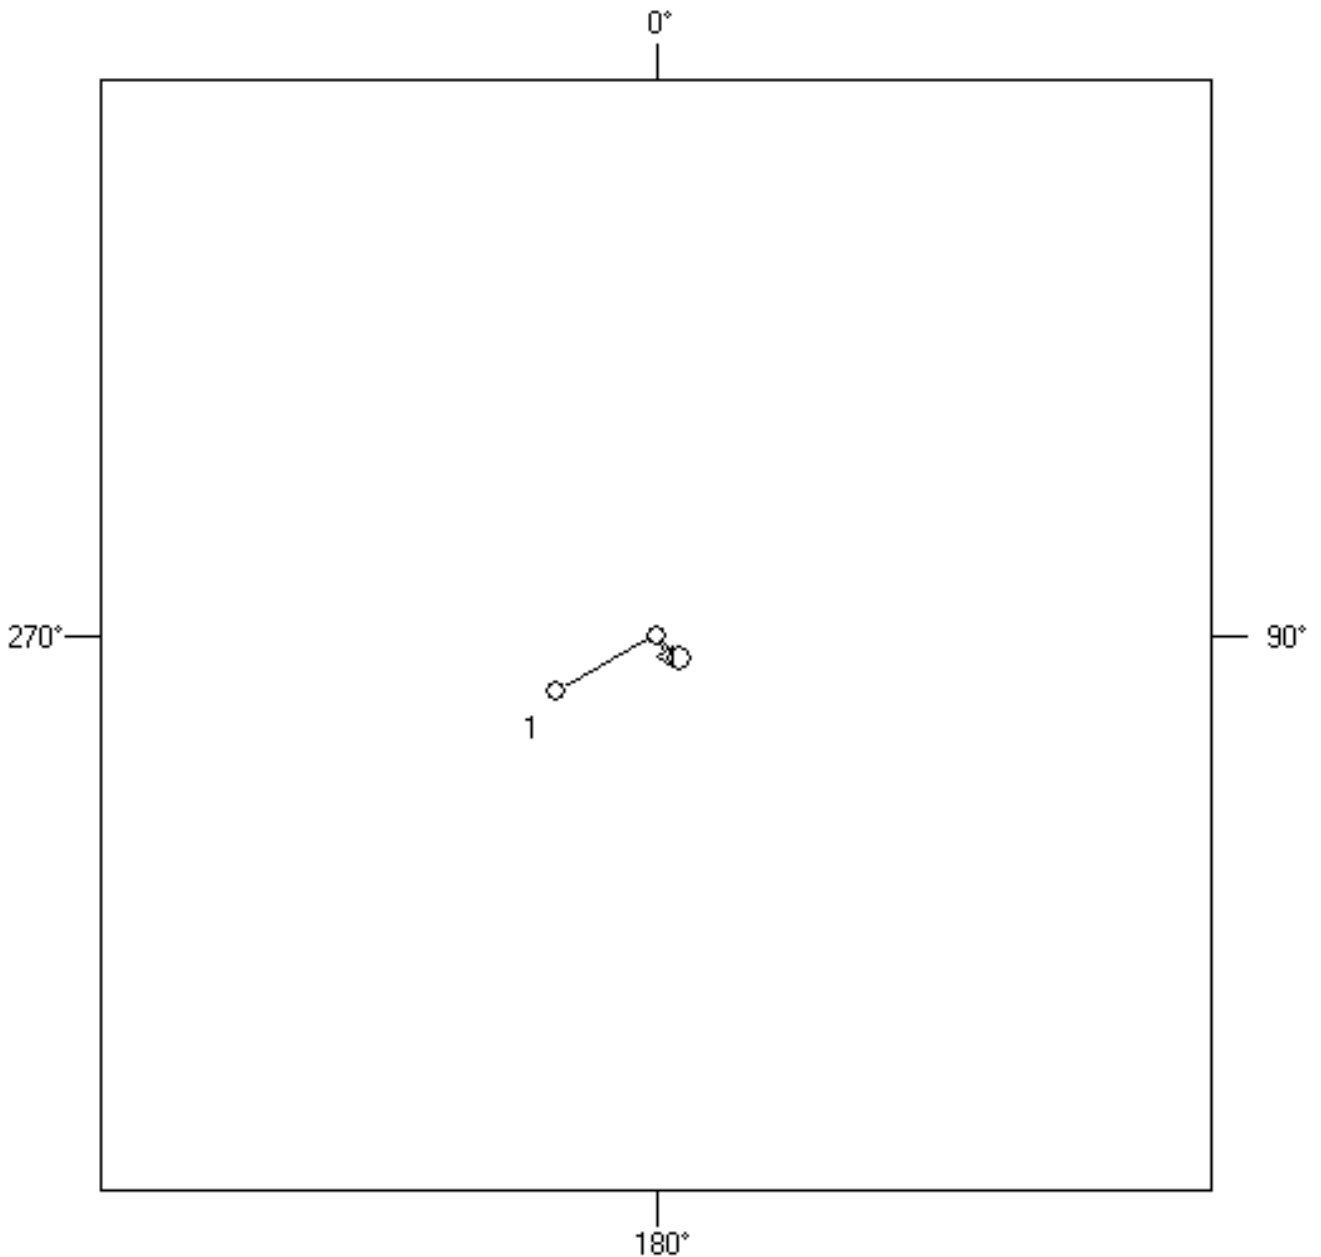

PoleForeman - Pole Loading Analysis Report

License: Alpine Communication Corp

Version 7.4.17

INSULATORS

Insulator	Attach	Loading	Angle
-----------	--------	---------	-------

ARM / BRACKET DATA

Arm/Bracket	Attach	Vert Loading	Horz Loading
-------------	--------	--------------	--------------

SPANS

Span: 1 **Span Length (ft): 93** **Direction: 241°**

Secondary					
1/0 AL TPX Slack	90	0	26.3	21.8	568

EQUIPMENT

Equipment	Weight (lbs)	Attach (ft)	Direction
4U4MT360X06F60SO Top Mount	67.0	33.5	135°

RISERS

Riser	Length (ft)	Direction
PVC U-GUARD 2"	25	153°

PoleForeman - Pole Loading Analysis Report

License: Alpine Communication Corp

Version 7.4.17

Solid Model View

